



OAE AUTO-GATE SYSTEM

QUALITY ▶ RELIABILITY ▶ SAFETY ▶ SECURITY

SWING TYPE (ARM)



● Model : 333 (Stainless Steel)

OAE 333A Arm Autogate set



Panel Box Set include :

- @ Swing Arm Control Panel built-in Receiver**
- @ 4ch Transmitter * 3pcs**
- @ 12V 7AH Backup Battery**
- @ Transformer 12V 9V 0 9V 12V**



TRANSMITTER AND RECEIVER

- Type : Battery operated, Modulated radio wave 2- channel, 330mhz
- Range : Effective 20 meters
Max 40 meters
- Security : Using encoder & decoder set by 8 x 3 ways dip-switch easily accessible and change by owner

Reminder

Only operate the auto-gate when you have visual contact with it to make sure no people and object blocking the path. Avoid using a remote controller with unnecessarily long operating range



FOLDING TYPE



SWING TYPE


● Model : 333A, 333B

TECHNICAL SPECIFICATION :

Swing type auto-gate


- Driving Method : Electro - mechanical screw driver piston type
- Operating Voltage : DC 18 V for normal speed
DC 12 V for ending speed
- Motor Output : 15 watt per arm
- Motor Amp. : 2.1
- Piston displace : 32 cm
- Piston Speed : 2.9 cm/sec
- Back-up Battery : 12 volt, 7AH Rechargeable
- Safety Clutch : Electric current sensing using Hi-Amp Auto-Reverse / stop.
- Safety Barrier : Infrared beam sensor (optional)
- Electric Controller : Micro-processor based
- Manual Operation : Special released Key / devise during power failure.

DIMENSION GUIDE TO CONSTRUCT A SWING GATE

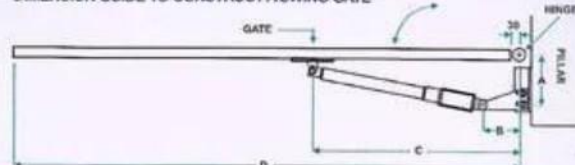

A	165mm ~ 180mm
B	128mm ~ 140mm
C	816mm ~ 837mm
D	Min 1000mm

DIMENSION GUIDE TO CONSTRUCT A FOLDING GATE

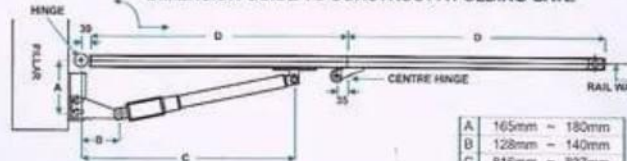

A	165mm ~ 180mm
B	128mm ~ 140mm
C	816mm ~ 837mm
D	Min 1000mm

