

DS-TVL224-4-5Y/2 Rows

2-Lines 2-Color 8-Characters Dark-Grey Outdoor Entrance & Exit LED Screen



- Placed in the entrance of the parking lot, displaying the information of welcome, advertising and news, etc.
- Displaying standard Chinese characters and numeric characters, and its standard communication method is RJ45, both online and offline are supported
- Displaying content can be the remaining parking spaces of the whole parking lot, license plate number, charge and weather forecast, etc.
- Displaying different content according to the instruction from the host computer
- ar subtitle


▪ Specification

Installation	
Maintenance Mode	Front
Display Screen	
Pixel Pitch	P4.75
Resolution	64*32
Display Content	GB2312 Character Set, 16*16 Lattice Chinese Characters
Screen Type	LED
Display Color	Red,Green,Yellow
Number of Module	1
Viewing Angle	120° (H) / 120° (V)
Display Mode	instant, left shift, up forward, etc.
Pixel Pitch Category	4.75
Color Temperature	3000k to 6000k
Brightness Uniformity	≥95%
Color Uniformity	≥95%
Contrast Ratio	2000 : 1
Luminance	1500cd/m ²
Scanning Mode	8S
Communication Mode	TCP
General	
Screen Border Material	Iron Frame Spraying Plastic (Dark armored glass for display part)
Working Temperature and Humidity	-30 to 60 °C 10% to 85% RH
Power Supply	AC110-240V,50/60Hz,max0.5A
Package Dimensions	475mm*430mm*185mm
Dimensions	355 × 315 × 80 mm (13.98 × 12.4 × 3.15 inch)
Weight	5.3 kg (11.68 lb.)
Weight (with Package)	6.4 kg (14.11 lb.)
Storage Temperature and Humidity	-40 to 70 °C 10% to 85% RH
Average Consumption	10W
Max. Consumption	30W
Lifespan	100000Hours
Approval	
Protection	IP54

▪ Available Model

DS-TVL224-4-5Y(2 Rows)

▪ **Dimension**

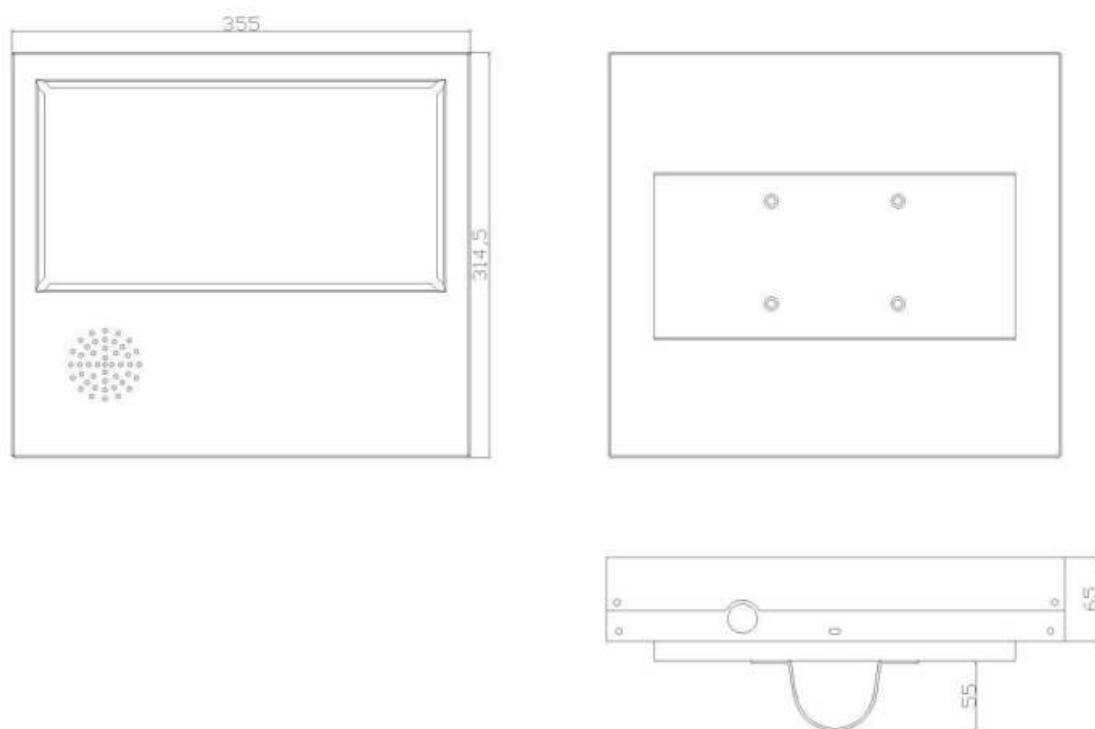

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5938
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq