

RD.MW3538

Entrypass Mifare Reader

Specification

MW3538 reader is based on Mifare technology, which is the most widely used in the market.

MW3538 is designed to read the Mifare CSN (Card Serial Number) or any ISO14443A compatible card.

Convenience installation

Convenience in installation, the shedding-proof blot is used in bottom of cover shell so that the screw will not drop out even in a very difficult installation position; Adopted to both UK and US standard gang box installation; Tamper protection is build in for high security requirement; Reader is potted to meet different installation requirements; Support both Wiegand output or RS485 output (optional);

Configuration Card

Support Reader Configuration Card, which allow the customer to change the reader configuration settings (such as, Wiegand output format, Card reading configuration, Buzzer control etc;) easily at site by flashing a card;

Design & Technologies

CSN

Support reader to read CSN and files of CPU cards.



Tamper protection



Support on-site Reader Configuration Card to change certain parameters.



Economical mullion mounts type



Easily see under dark environment.
Could be use as a door location

Friendly Installation



All weather proof design with IP65 certificate.



Universal back plate allows the reader be installed on different size of gang box.

12V

All inputs are 12Vdc protected.



Reverse power protection.



All input and output signals are protected against static charges.



Non-drop bottom screw made servicing handler.

RD.MW3538

Entrypass Mifare Reader




Technical Specification

Re-configure Window	5 seconds (Default)
Reader Output Format	CSN/UID 32bits, 34bits, 56bits (backward/forward), file content reading for programmed ID
Buzzer Control	Reader & Controller control (Default) or Controller control only.
LED/Back lit Control	Define different LED color response base on LED input
Typical Read range	>4 cm
Reader Standard Output	Wiegand (RS232 & RS485 optional)
Frequency	13.56MHz
Input Voltage	12VDC
Operating Current	150mA (max)
Operating Temperature	-30°C - 70°C
Exterior dimension	150mm(L) x 53mm (W) x 25 mm (H)
Case material	PC+ABS
Standard Color	Black
Operating Humidity	10% - 90%
Weight	180g

RD.MW3538

Entrypass Mifare Reader

Dimension

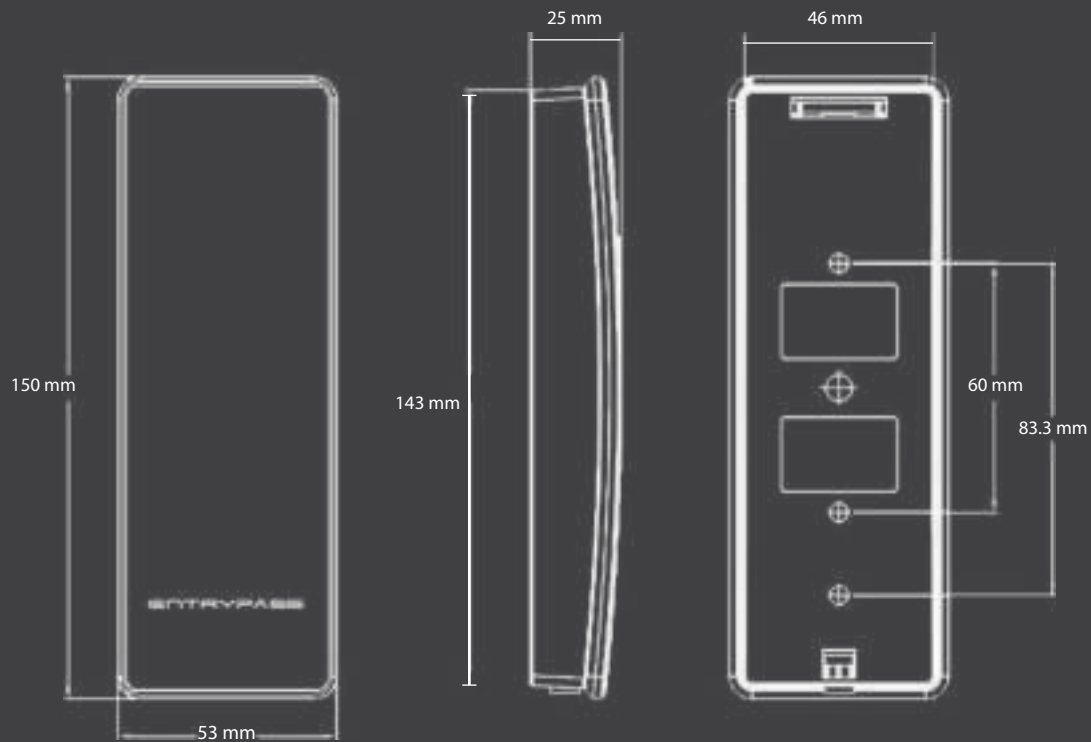

Ordering Information

RD.MW3538

Entrypass Mifare Reader



www.entrypass.net

Malaysia

No. 40, Jalan TPP 1/10, Taman Industri Puchong,
Batu 12 Jalan Puchong, 47160 Puchong
Selangor Darul Ehsan, Malaysia.
Tel : +603 8068 1929
Fax : +603 8062 6937
Email : info@entrypass.net

Singapore

No. 1, UBI View, #03-03, Focus ONE Building,
Singapore 408555.
Tel : +65- 6841 7242
Fax : +65- 6841 3937
Email : info@entrypass.net

Indonesia

PT Brikom Entripas Indonesia
Jl. Griya Utama, Komplek Puri Mutiara Blok BF No. 17,
RT.1/RW.20, Sunter Agung, Tj. Priok, Kota Jkt Utara,
Daerah Khusus Ibukota Jakarta 14350.
Tel : +62 21 2937 6098
Email : info@entrypass.net